


Izmetalne igle s cilindrično glavo iz nerjavečega jekla (nirosta) HA02 tip A / Podobne DIN ISO 6751.

Ejector Pins with cylindrical head, stainless steel (TKS) HA02 type A / Similar to DIN ISO 6751.

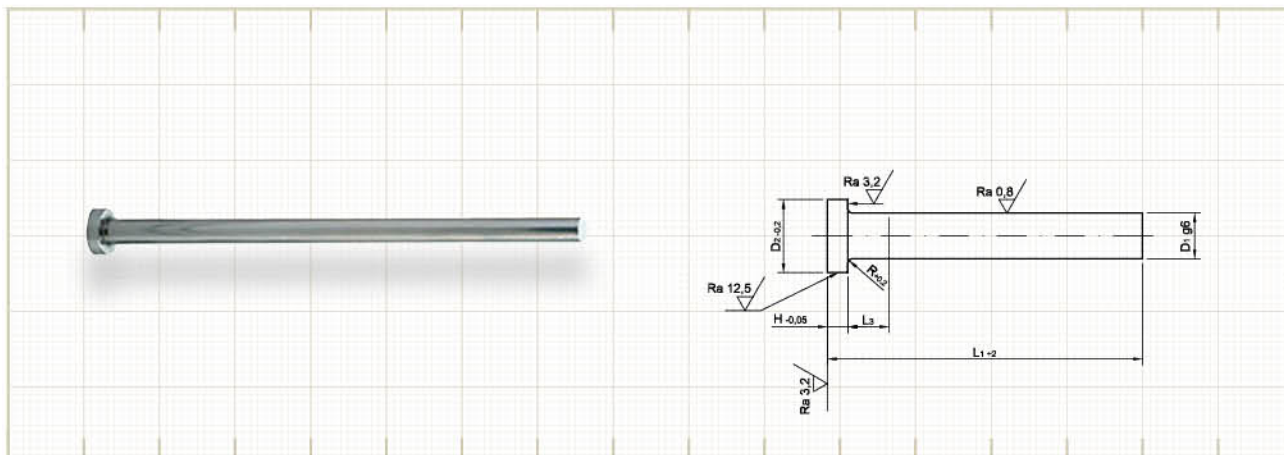

Obseg uporabe:

Posebej primerna za plastične dele v medicinski in prehranjevalni industriji.

Dimenzije so prikazane v tabeli.

Prileganje / Toleranca:

Premier D_1

$\varnothing$	1,5 - 3	3,2 - 6
g6	-0,002	-0,004
	-0,008	-0,012

Material:

- DIN Nr. 1.4125

Karakteristike:

Primerne do najvišje temperature 180°C / 356°F

Trdota	HRC
Steblo	60±2
Glava	35±5

Obdelava:

Brušeno steblo, vroče kovana cilindrična glava, kaljeno.

Range of application:

Especially suitable for plastic parts in the medical and food industries.

The dimensions are shown in the table.

Fit / Tolerance:

Diameter D_1

$\varnothing$	1,5 - 3	3,2 - 6
g6	-0,002	-0,004
	-0,008	-0,012

Material:

- DIN Nr. 1.4125

Material properties:

Appropriate to the highest temperature of 180 ° C / 356 ° F

Hardness	HRC
Shank	60±2
Head	35±5

Finish:

Ground shank, hot forged cylindrical head, hardened.

Ø D ₁ g6 [mm]	D ₂ x H _{-0,2} / H _{0,05} [mm]	R _{+0,2} [mm]	Model HA02 L ₁₊₂ [mm]			
			100	160	200	250
2,00	4x2	0,2	●	●	●	●
2,50	5x2	0,3	●	●	●	●
3,00	6x3		●	●	●	●
3,50	7x3		●	●	●	●
4,00	8x3		●	●	●	●
4,50			●	●	●	●
5,00	10x3		●	●	●	●
5,50			●	●	●	●
6,00	12x5	0,5	●	●	●	●
8,00	14x5					●
10,00	16x5					●

Opomba: Izognemo se problemom s korozijo. Za igle z reduciranim delom (tudi ploščatim) povprašajte.

Note: Avoiding the problems with corrosion. For pins with reduced point (including flat). Ask.